

Building prep work for Kratki ARKE 95

1. The opening in wall required for this ARKE 95 fireplace should be exactly

990mm wide


610mm high

With this exact size opening the fireplace will slot into the opening and the frame will cover the small gap between the fireplace and brickwork. Plastering and painting can be finished before fireplace installation.

2. The depth of the cavity should be **minimum 470mm deep**.
3. The fireplace requires an electrical connection for fans. Please provide a conduit running from a nearby isolator switch through to the back of the ledge that the fireplace is sitting on.

Below image – “45-degree bends avoid lintels” If the wall on front face of fireplace is a double brick wall then the inside lintel should be set at least 400mm higher to allow space for 45-degree bends.

The chimney cavity space running vertically around the flue pipe should preferably allow at least 250 x 250mm space for the flue pipes.

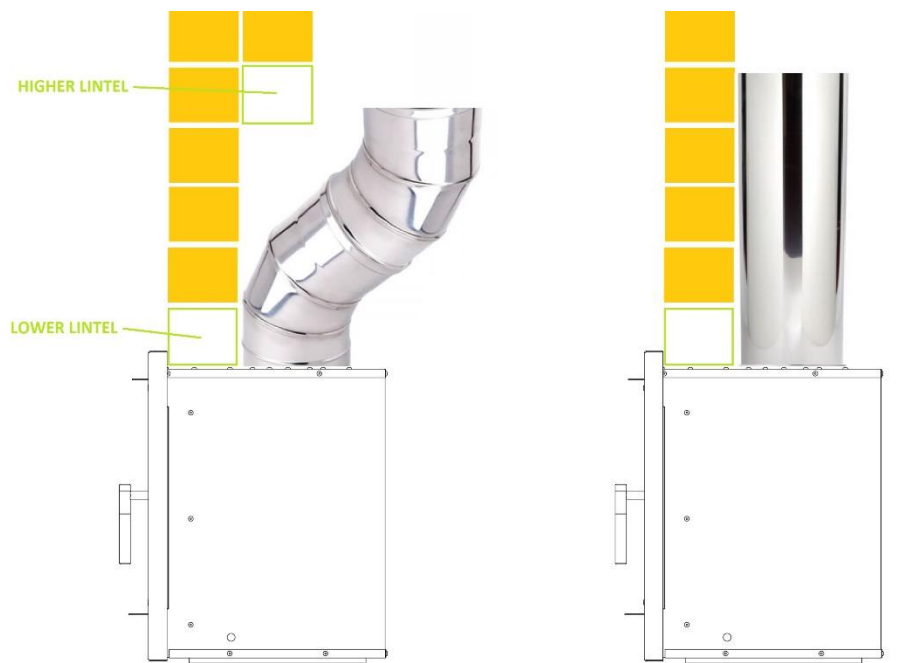

IF THE WALL IN FRONT OF FIREPLACE IS A DOUBLE BRICK WALL THEN ENSURE THAT THE INNER WALL HAS A LINTEL STARTING HIGHER UP TO ALLOW SPACE FOR FLUE PIPE 45 DEGREE BENDS

